



| | |
|----|----------|
| 1 | /CS |
| 2 | /RST |
| 3 | A0 |
| 4 | /WR(R/W) |
| 5 | /RD(R) |
| 6 | DB0 |
| 7 | DB1 |
| 8 | DB2 |
| 9 | DB3 |
| 10 | DB4 |
| 11 | DB5 |
| 12 | DB6(SCT) |
| 13 | DB7(SCT) |
| 14 | VDD |
| 15 | VSS |
| 16 | VOUT |
| 17 | C3P |
| 18 | C1N |
| 19 | C1P |
| 20 | C2P |
| 21 | C2N |
| 22 | V4 |
| 23 | V3 |
| 24 | V2 |
| 25 | V1 |
| 26 | V0 |
| 27 | C86 |
| 28 | P/S |

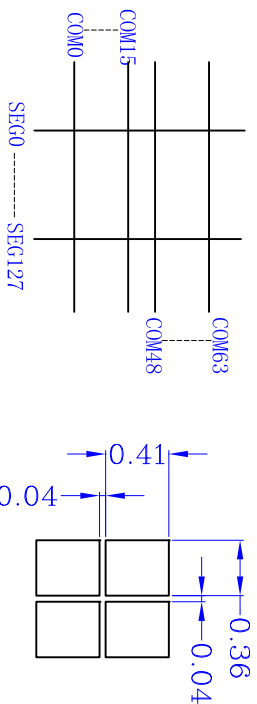

- NOTES:
1. DISPLAY TYPE: STN, YELLOW-GREEN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/32DUTY, 1/6BIAS
 8. CONTROLLER: ST7565R
 9. BACKLIGHT TYPE: YELLOW-GREEN
 10. BACKLIGHT SUPPLY VOLTAGE: +3.0V

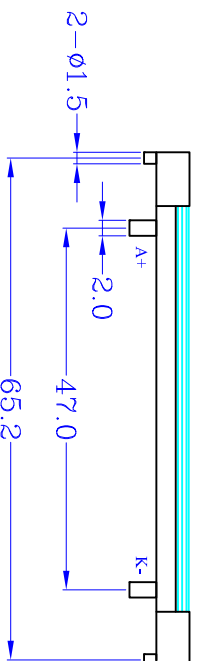

WAYING (HONGKONG) SHARES LIMITED

DESIGN: MODEL NUMBER: UNITS: MM

CHECK: WYM12832K7G VERSION: A

APPROVE: SHEET: 1 OF 1

Unspecified tolerances are ±0.3 DATE: 2013-07-17