



1	VSS	Power ground
2	A0	"H": Data ; "L": Instruction
3	/wr	Write signal
4	/rd	Read signal
5	/CS	Chip select
6	/RES	Reset signal
7	VDD	Power supply (+3.3V)
8	DB0	DATA BUS 0
9	DB1	DATA BUS 1
10	DB2	DATA BUS 2
11	DB3	DATA BUS 3
12	DB4	DATA BUS 4
13	DB5	DATA BUS 5
14	DB6	DATA BUS 6
15	DB7	DATA BUS 7
16	K	Backlight (-)
17	NC	No connection
18	A	Backlight (+) +3.3V
19	NC	No connection
20	NC	No connection

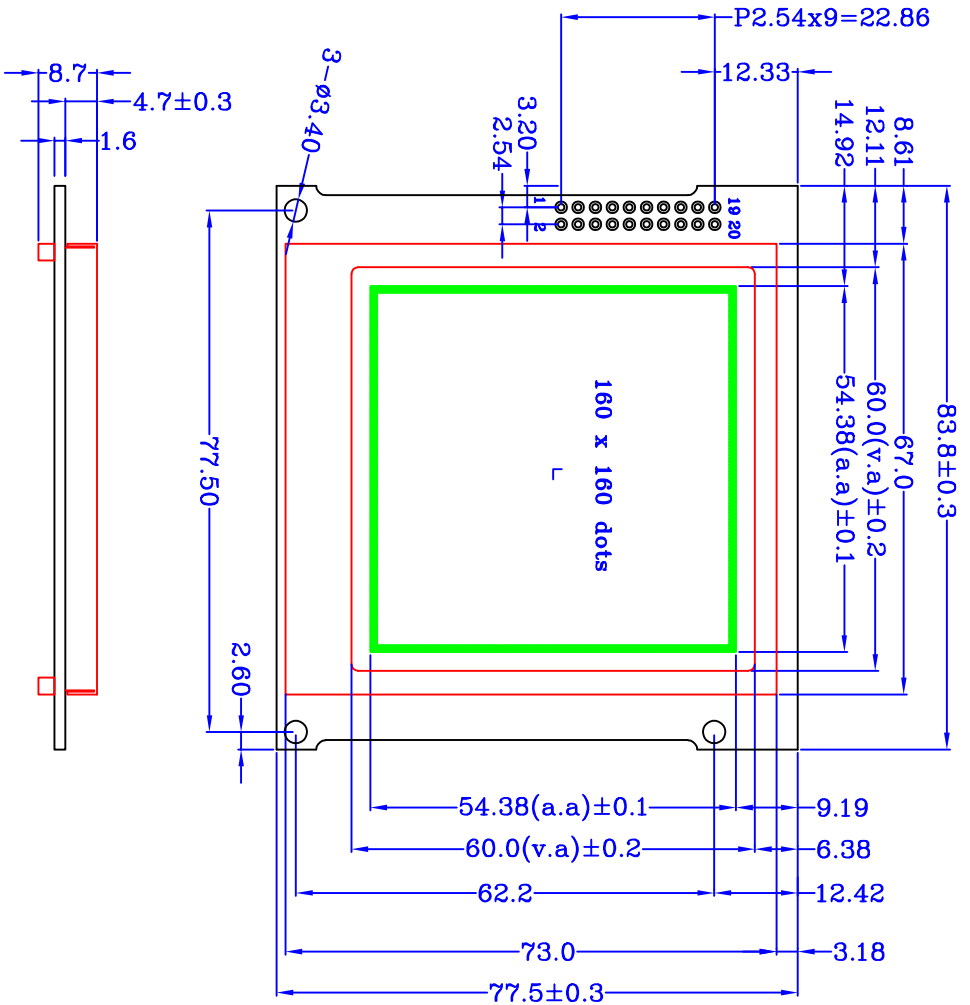

NOTES:

1. DISPLAY TYPE: FSTN
2. POLARIZER TYPE: TRANSPARENT, POSITIVE
3. VIEW DIRECTION: 6:00
4. OPERATING TEMPERATURE: -40°C~+70°C
5. STORAGE TEMPERATURE: -40°C~+80°C
6. VDD: +3.3V
7. DRIVE METHOD: 1/160DUTY, 1/12BIAS
8. CONTROLLER: ST75161
9. BACKLIGHT TYPE: WHITE
10. BACKLIGHT SUPPLY VOLTAGE: +3.3V



WAYING (HONGKONG) SHARES LIMITED		DESIGN:	MODEL NUMBER:	UNITS:	MM
		CHECK:	WYM160160K12	VERSION:	A
APPROVE:		SHEET:	1 OF 1	DATE:	2021-05-09
Unspecified tolerances are ±0.3					